

All gasoline engines, Model year 1972 to 1974

## Test values with warm engine

Pressure in bar (atü)

Min. compression with model year 1972 to 1974

approx. 7.5

Permissible difference between individual cylinders

max. 1.5

## Special tool

Compression pressure recorder, complete


001 589 46 21 00

## Note

Check cylinders for leaks when minimum compression pressure is too low.

Disconnect cable from ignition coil terminal 1.

- Connect contact handle to + battery and terminal 50 to crank engine.
- Crank engine several times with ignition switched off and spark plugs removed to throwout residue and soot.

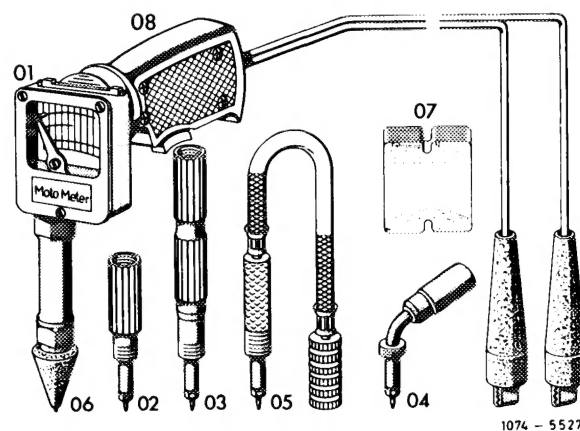

- Push compression pressure recorder into spark plug bore of respective cylinder.

- Crank engine for approx. 8 revolutions for measuring while accelerating.

Measure all cylinders in this manner, but put data sheet in compression pressure recorder into new working position first each time.

